

Specification

CUA
Game Machine MOTHERBOARD

Processor

- Socket 370
- Intel® FCPGA Pentium® III 450~933+MHz
- Intel® PPGA Celeron™ 333~566+MHz

Chipset

- ALi® ALaddin TNT2 AGPset
(ALi® M1631 North Bridge and ALi® M1535D South Bridge)
- Integrated nVIDIA RIVA TNT2 3D Graphic Engine
- Supports UltraDMA/66, 4 USB Ports

FSB

- 133/100/66 MHz

Memory

- 3 x DIMM
- Max. 1.5GB PC133/PC100 non-ECC SDRAM

Expansion Slots

- 1 x AMR
- 6 x PCI
- 1 x Video Slot for TV-Out/DFT

VGA

- Integrated nVIDIA RIVA TNT2 3D Graphic Engine

IDE Ports

- 2 x UltraDMA/66/33

Audio


- AC'97 Compliant 3D Audio
- Crystal® 4299 CODEC

LAN

- N/A

SCSI

- N/A

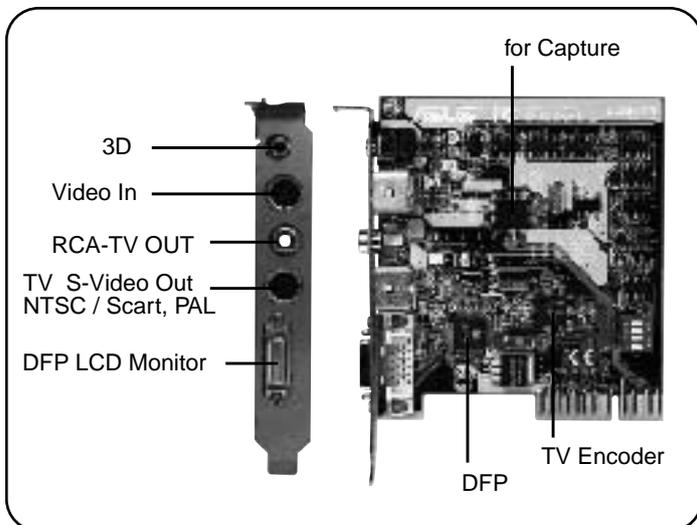

Special Features

- Power Loss Restart, ASUS® JumperFree™, CPU Throttle, STR (Suspend to RAM)

Back Panel I/O Ports

- 2 x USB
- 1 x Parallel
- 1 x Serial
- 1 x PS/2 Keyboard
- 1 x PS/2 Mouse
- 1 x Audio I/O
- 1 x Game/MIDI
- 1 x VGA

Onboard I/O Interface

- 2-USB Headers
- SIR/CIR
- Headphone
- MIC
- CPU/Power Supply/Chassis Fans
- ATX Power
- IDE LED

BIOS

- 2/4Mb, Award® BIOS, PnP, ACPI, SM BIOS, TCAV (Trend® ChipAway Virus), Green, Boot Block, Symbios® SCSI BIOS

Industrial Standard

- PCI2.2, USB1.1

Manageability

- WfM2.0, DMI2.0, WOL, WOR, Chassis Intrusion, SM Bus

Support CD

- Drivers
- ASUS® PC Probe
- Trend® PC-cillin 98 Anti-Virus Utility
- ASUS® LiveUpdate™ Utility
- Cyberlink® PowerPlayer, PowerDVD Trial, Video Mail
- YAMAHA® S-YXG50 Software Wavetable

Accessories

- User's Manual
- UltraDMA/66 Cable
- Floppy Cable
- 2-Ports USB Bracket
- 9-pin COM Port Bracket

Board Size

- ATX Form Factor
- 8.5"x 12" (21.6cm x 30.5cm)

ASUS®

The specification is subject to change without notice.
The brand and product names are trademarks of their respective companies.

Copyright© June. 23, 2000 ASUSTeK Computer Inc. 15-271002000
150 Li-Te Rd., Peitou, Taipei, Taiwan
<http://www.asus.com/>